

SPECIFICATIONS

RF Cable

Constituent

Cable: 26AWG(7/0.16) Coaxial Cable

Connector: Mini UHF + RF Female Connector

RF Series

RF Female Connector to
Mini UHF Connector Cable

Mechanical

Durability: 500 Cycles

Electrical

Insulation Resistance: 100M Ω min. at 200V DC for 1 Sec.

Dielectric Withstanding Voltage: 500V AC at 0.5mA for 1 Sec.

Insertion Loss: 1.5dB max. at 925MHz, 2.0dB max. at 1.9GHz

Physical

Operating Temperature: -40°C to +60°C


Storage Temperature: -40°C to +60°C

Agency Approvals

UL 94V-0 rated



DRAWING

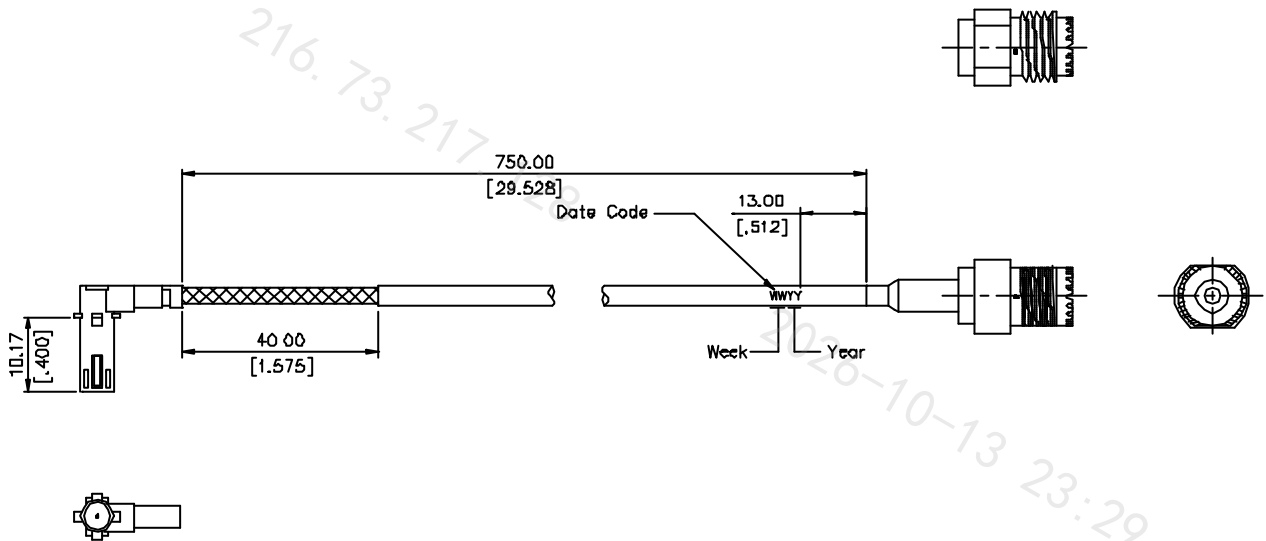

ORDERING INFORMATION

PRODUCT NO.: CYR2-AP03MJ10

Cable Assembly	Extension Code
High Frequency	Jack
RG174 Raw Cable	Mini UHF
Antenna Conn	Length
Plug	